

CARBON MONOXIDE MONITOR/ALARM

The CO monitor is compact, easy to install and operate. The instrument incorporates a rotameter for confirmation of proper air-flow, a backlighted digital display and a highly specific electrochemical carbon monoxide sensor for trouble-free and reliable operation.

The monitor is designed for use in a wide variety of applications ranging from automotive, medical, paint spray operations to wood finishing. This monitor can be used in virtually any commercial or industrial process that requires CO monitoring of compressed breathing air for personnel working in such operations.



SPECIFICATIONS

Range:	0-50 ppm CO
Alarm Levels:	
Alarm 1:	5 ppm CO, user adjustable
Alarm 2:	10 ppm CO, user adjustable
Alarm 3:	20 ppm CO, user adjustable
Alarm Adjustment:	All three alarms are user adjustable between 3 to 50 ppm
Audible Alarm:	105 dB at 30 cm (12 inches)
Visual Gas Alarm:	3 Red LEDs
Visual Power/Fault:	Green/Red LED
Display:	8 Character, high contrast dot matrix LCD with backlight
Resolution:	1 ppm
Sensor:	Electrochemical
Response Time:	$t_{90} = 30$ sec
Accuracy:	+/- 10% of reading
Temperature Range:	32° to 104° F (0° to +40° C)
Outputs:	
Relays:	4 Form C, 10A SPDT contacts, 3 gas alarms and 1 fault
Analog:	4-20mA
Digital:	RS-485 Modbus
Power:	110 VAC, 220 VAC and/or 24 VDC, 15W
Power Connection:	Supplied with strain relief for 0.20 to 0.35 inch diameter cable
Inlet Air Line	
Connection:	1/4" NPT female
Air Line Sample	
Hose to Monitor:	5 foot length
Inlet Pressure:	60 to 150 psi, air supply lines, 55 psi regulated to monitor
Enclosure:	Polycarbonate
Size, Instrument Only:	7 x 5 x 3 inches (18 x 13 x 8 cm)
Weight,	
Instrument Only:	2 lbs (0.9 kg)

Consult factory for oxygen or other optional instrument configurations.


Compact Compressed Air Line Carbon Monoxide Monitor/Alarm

FEATURES

- Compact Design
- Digital Display
- User Programmable Alarms & Relays
- 4-20 mA Output
- RS-485 Digital Communication Capability
- 110 VAC, 220 VAC, 24 VDC Power Options
- "Intelli-Cal" Push-button Calibration Procedure
- 3 Levels of Alarms
- Protected Maintenance Functions
- Audio and Visual Alarms
- High Integrity Polycarbonate Enclosure
- High Capacity Relays
- Flow Meter for Confirmation of Airflow

ACO-600-105 Compact Compressed Air Line Carbon Monoxide Monitor/Alarm

EXTERNAL CO-MONITOR FEATURES

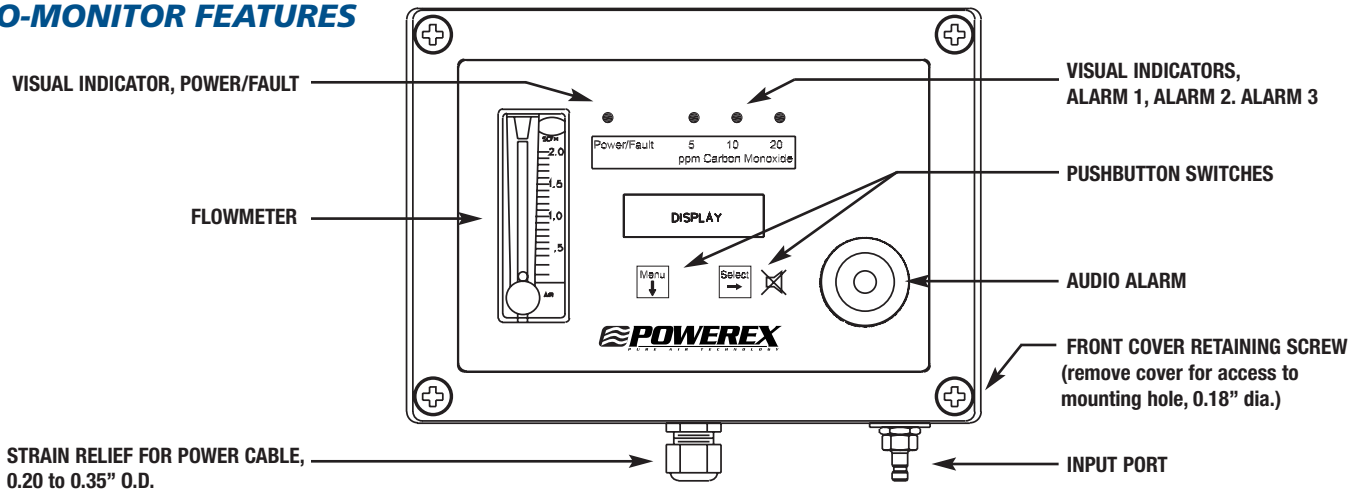


ORDERING INFORMATION

Instrument	Part No.
CO-Monitor	ACO-600-105

Calibration Kit	
Aerosol Gas, 20 ppm CO, 11 liter, w/bellows assy*	AC001514
Aerosol Gas, 20.9% O ₂ , 11 liter, w/bellows assy*	
Calibration Equipment Case	

***NOTE:** These aerosol cylinders can ship by ground transportation without a hazmat fee.

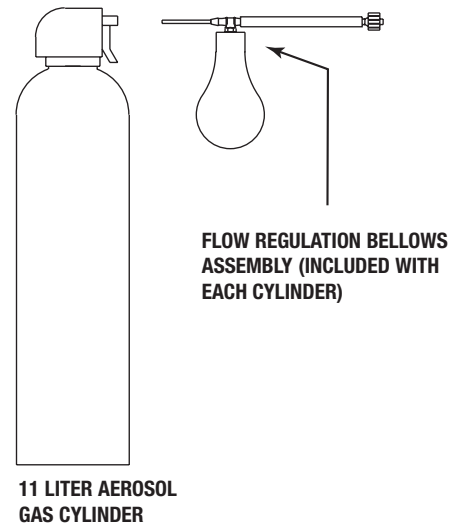

WARNING:

CO-Monitor should not be used without an oxygen monitor unless there is complete assurance that inert gas cannot be accidentally injected into the breathing air line.



150 Production Drive • Harrison, Ohio 45030 • U.S.A.
 Telephone: 1-888-769-7979 • Fax: (513) 367-3125
www.powerexinc.com

Distributed by:

SR4292 02/07