


Submittal Data Sheet

Features

- Adjustable line regulator 0-125 psig or 0-200 psig (N₂).
- Copper pigtails provided with Oxygen service. Flexible stainless braided pigtails CGA gas specific pigtail connections for all other gas services.
- Complete system cleaned for use with Oxygen.
- Cylinder contents gauge and delivery pressure gauge included.
- Outlet union provided – ½ Male NPT.
- Wall mounting bracket included.
- Maximum inlet pressure 3,000 psig.
- Optional pressure switch port ½ female NPT.
- Optional pressure switch.
- Optional remote audio visual alarm.

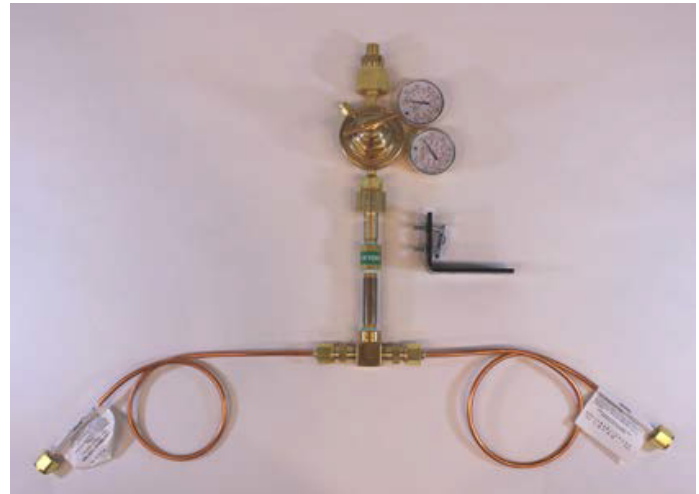

Model PX-TSD-540 shown above


Ideal for veterinary applications where manual switching of cylinders and a possible interruption of gas service are allowable. Systems are available for nitrous oxide, carbon dioxide, nitrogen, medical air and oxygen.



Model PX-TAV-1 Shown above
Optional remote audio visual alarm must be used with optional pressure switch



Model PX-TSDWPHP-580 with PX-PS-160-3200 pressure switch shown with optional pressure switch above

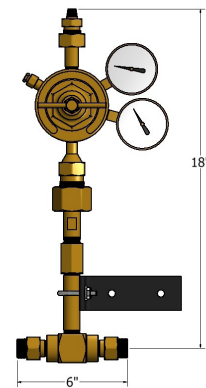

Dimensional information
Allow 20" of wall space for two gas cylinders.

Ordering Information

Control Type	Pressure Switch Port	Delivery Pressure	Gas Service
PX-TSD	WP (with port & pressure switch)	Blank = 0-125 psig	346 = Medical Air
	Blank = (without port)	HP = 0-200 psig	320 = Carbon Dioxide
			326 = Nitrous Oxide
			540 = Oxygen
			580 = Nitrogen

Examples: PX-TSD-540 = TSD system without pressure switch port, 0 – 125 psig, for Oxygen
 PX-TSDWPHP-580 = TSD system with pressure switch port, 0 – 200 psig, for Nitrogen